


Platinum 4.0MP VF Network Dome Camera CMIP7043W-MZ



Key Features:

- 4.0MP High Definition
- 120dB WDR
- 3D DNR, BLC, Intelligent H.265, H.265+H.264 Zip+
- 2.8 mm to 12 mm motorized lens
- IP67, IK10 Vandal-Proof
- DC 12V/ PoE

Dimensions:

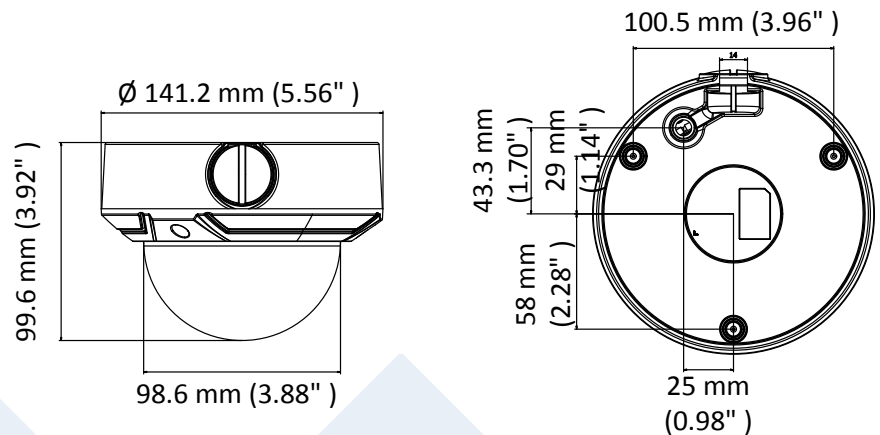

WDR
120dB



Platinum 4.0MP VF Network Dome Camera CMIP7043W-MZ

| CAMERA | |
|------------------------|--|
| Image Sensor | 1/3 " Progressive Scan CMOS |
| Min. Illumination | 0.01Lux @ (F1.2, AGC ON), 0.018Lux @ (F1.6, AGC ON) |
| Shutter Speed | 1/3 s to 1/100,000 s |
| Lens | 2.8 to 12 mm, Horizontal view: 98° to 28° ,Vertical view: 51° to 16° ,Diagonal view: 115° to 32° |
| Lens Mount | Φ14 |
| Day & Night | IR cut filter |
| DNR | 3D DNR |
| Wide Dynamic Range | 120dB |
| Angle Adjustment | Pan: 0° to 355° , tilt: 0° to 70° , rotation: 0° to 360° |
| Compression Standard | |
| Video Compression | Main stream: H.265/H.264 Sub stream: H.265/H.264/MJPEG |
| H.264 Type | Baseline Profile/Main Profile/High Profile |
| H.264 Zip+ | Main stream supports |
| H.265 Type | Main Profile |
| H.265+ | Main stream supports |
| Video Bit Rate | 32 Kbps ~ 8 Mbps |
| Image | |
| Max. Resolution | 2560 × 1440 |
| Main Stream | 50Hz: 20fps (2560 × 1440, 1920 × 1080, 1280 × 720) 60Hz: 20fps (2560 × 1440, 1920 × 1080, 1280 × 720) |
| Sub Stream | 50Hz: 20fps (704 × 576, 352 × 288, 640 × 480, 320 × 240) 60Hz: 20fps (704 × 480, 352 × 240, 640 × 480, 320 × 240) |
| Image Enhancement | BLC/3D DNR |
| ROI | 1 fixed region for main stream and sub-stream |
| Image Settings | Saturation, brightness, contrast, sharpness, AGC, white balance adjustable by client software or web browser |
| Day/Night Switch | Auto/Scheduled |
| Network | |
| Network Storage | Support Micro SD/SDHC/SDXC card (128G), local storage and NAS (NFS,SMB/CIFS), ANR |
| Alarm Trigger | Motion detection, video tampering alarm, network disconnected, IP address conflicted, illegal login |
| Protocols | TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, UDP, Bonjour |
| Standard | ONVIF (PROFILE S, PROFILE G), PSIA, CGI, ISAPI |
| General Function | One-key reset, anti-flicker, heartbeat, mirror, password protection, privacy mask, watermark, IP address filter |
| API | ONVIF(PROFILE S,PROFILE G),ISAPI |
| Simultaneous Live View | Up to 6 channels |
| User/Host | Up to 32 users; 3 levels: Administrator, Operator and User |

Platinum 4.0MP VF Network Dome Camera CMIP7043W-MZ

| Interface | |
|-------------------------------|---|
| Communication Interface | 1 RJ45 10M/100M self-adaptive Ethernet port |
| Reset Button | Yes |
| General | |
| Operating Conditions | -22 ° F ~ +122 ° F (-30 ° C ~ +50 ° C) Humidity 95% or less (non-condensing) |
| Power Supply | 12 VDC ± 25%, 5.5 mm coaxial power plug, PoE (802.3af, class 3) |
| Power Consumption and Current | 12 VDC, 0.8 A, Max: 10W; PoE: (802.3af, 37V to 57V), 0.35 A to 0.2 A, Max: 12 W |
| IR Range | Up to 100ft(30m) |
| Protection Level | IP67, IK10 |
| Dimensions | Φ 5.6" × 3.9" (Φ 141 × 99.6 mm) |
| Weight | 1.8lb. (820 g) |