

Platinum Professional Level 4 Channel NVR 1U


LTN8704Q-P4



Key Features:

Rear Panel:

- H.265/H.265+/H.264/H.264 Zip+/MPEG4 video formats
 - Support live view, storage, and playback of the connected camera with up to the resolution of 8 Megapixels
 - Recording at up to 8MP resolution
 - Up to 1 SATA interfaces connectable for recording and backup
 - HDMI output at up to 4K(3840 x 2160) and VGA output at up to 1920 × 1080p resolution
- 1. Network Interfaces with PoE function
 - 2. Audio In
 - 3. Audio Out
 - 4. VGA Interface
 - 5. HDMI Interface
 - 6. LAN Network Interface
 - 7. USB Interface
 - 8. DC 48V power supply
 - 9. Power Switch
 - 10. GND

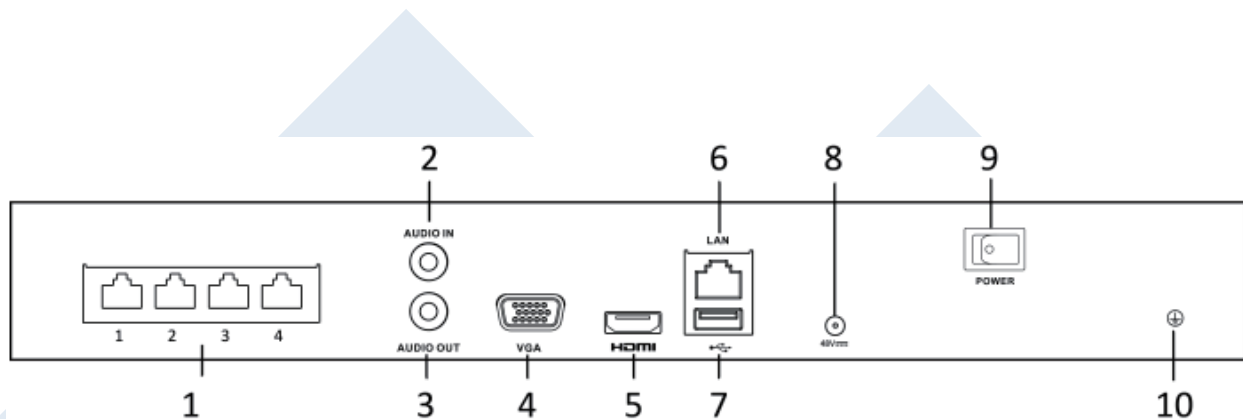

Platinum Professional Level 4 Channel NVR 1U

LTN8704Q-P4

| Video/Audio Input | |
|----------------------|--|
| IP video Input | 4-ch |
| Two-way audio input | 1-ch, RCA (2.0 Vp-p, 1kΩ) |
| Network | |
| Incoming bandwidth | 40 Mbps |
| Outgoing bandwidth | 80Mbps |
| Video/Audio Output | |
| Recording resolution | 8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/ 2CIF/CIF/QCIF |
| HDMI output | 4K (3840 × 2160)/30Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz |
| VGA output | 1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz |
| Audio output | 1-ch, RCA (Linear, 1kΩ) |
| Decoding | |
| Decoding format | H.265/H.265+/H.264/H.264 Zip+/MPEG4 |
| Recording resolution | 8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/ 2CIF/CIF/QCIF |
| Synchronous playback | 4-ch |
| Capability | 1-ch @ 8 MP / 4-ch @ 1080p |
| Hard Disk | |
| SATA | 1 SATA interfaces for 1 HDDs |
| Capacity | Up to 6TB for each disk |
| External Interface | |
| Network Interface | 1 RJ-45 10 /100 /1000 Mbps self-adaptive Ethernet interface |
| Network protocols | TCP/IP, DHCP, PT CLOUD, DNS, DDNS, NTP, IP Portal, SMTP, NFS, iSCSI, UPnP™, HTTPS |
| USB Interface | 2 × USB 2.0 |
| PoE | |
| Interface | 4, RJ-45 10/100 Mbps self-adaptive Ethernet interfaces |
| Max. Power | ≤ 50W |
| Supported standard | IEEE 802.3 af/at |
| GENERAL | |
| Power Supply | 48V DC |
| Power | ≤ 65W |
| Consumption | ≤ 10W (without enabling PoE) |
| Working Temperature | 14° F - 131° F (-10° C ~ +55° C) |
| Working Humidity | 10% - 90% |
| Casing | 1U chassis |
| Dimensions (WxDxH) | 315 × 240 × 48mm (12.4 × 9.4 × 1.9 inch) |
| Weight | ≤ 1 kg (2.2 lb) |