



6MP Dual light Bullet IP Camera with two way audio and SD card slot

Model: SST-DVC-BBC6-GR

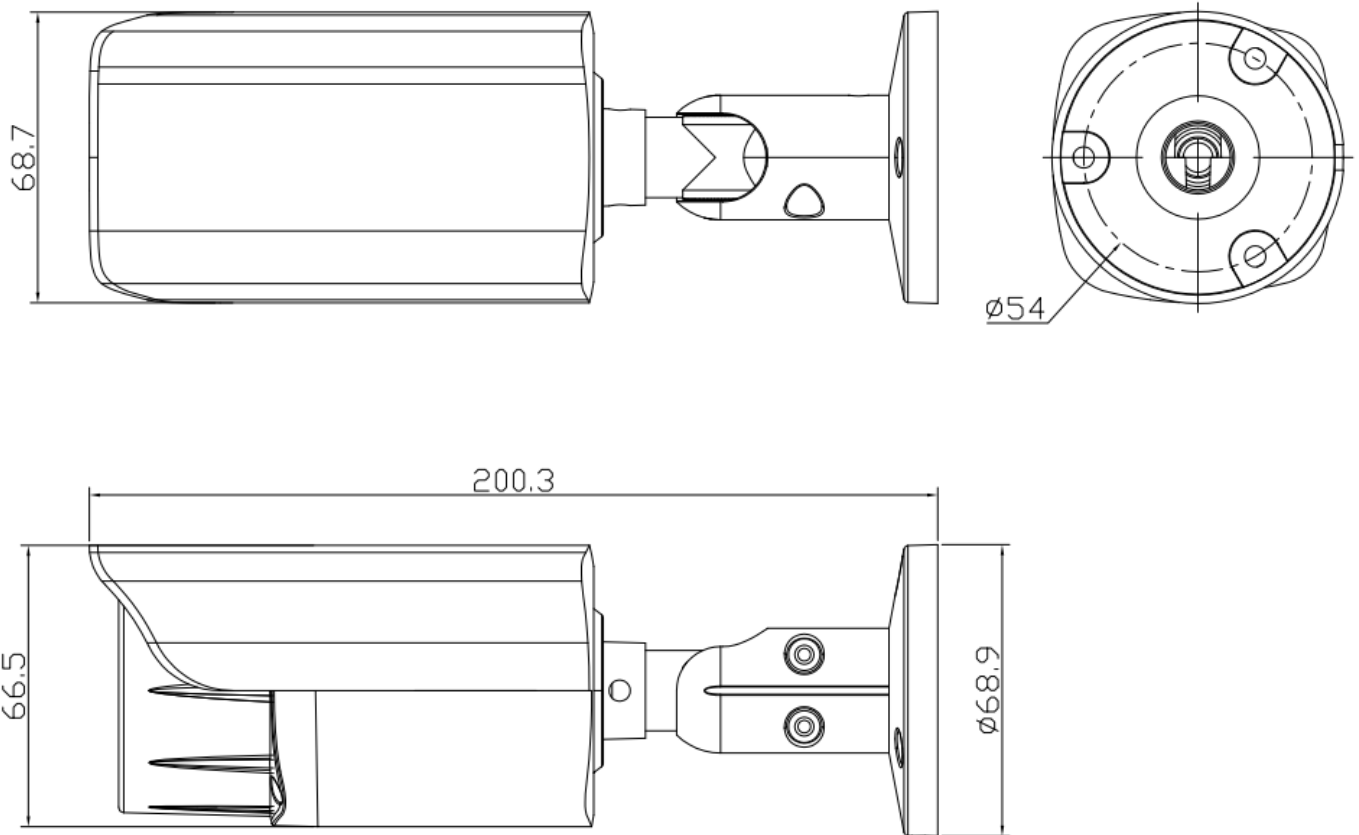

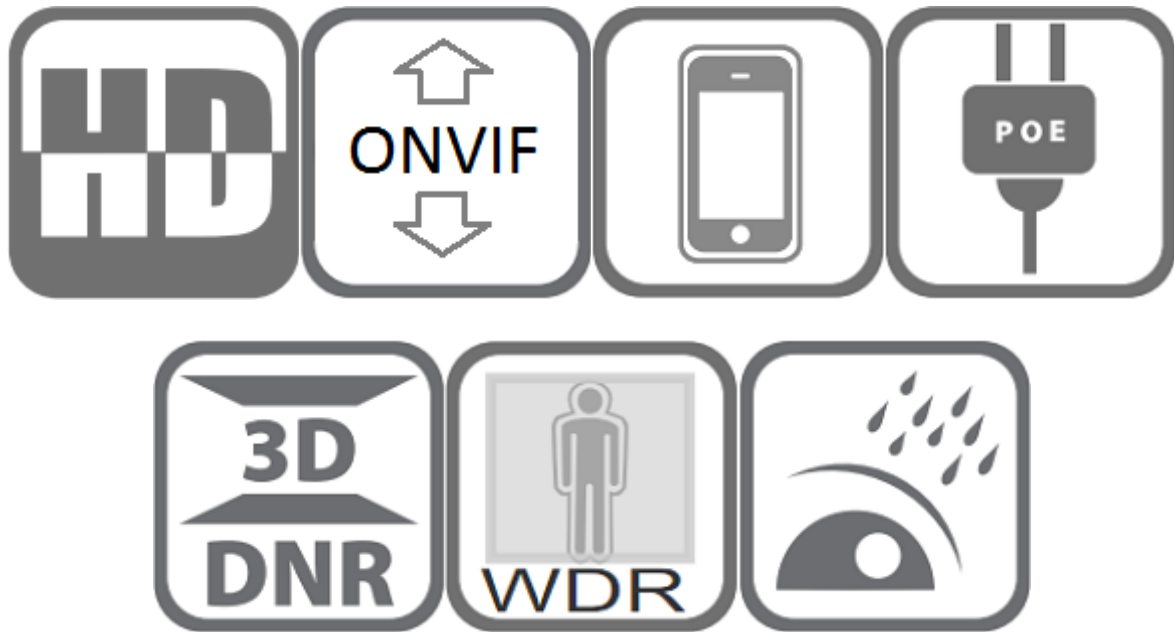

Features:

- ❖ 1/2.8" Sony IMX335 CMOS sensor
- ❖ Full HD resolution 6MP@3072 x 2048P
- ❖ Low illumination 0.01Lux
- ❖ Day/Night (ICR), AWB, AGC, BLC, 2D/3D-DNR, IR-CUT
- ❖ D-WDR, Motion Detection, Privacy Mask, Mirror
- ❖ RTSP and Onvif 17.06 compatible
- ❖ H.265/H.264 dual-stream media server
- ❖ Easy-to-use P2P Cloud service
- ❖ Multi web browser, PC Client, mobile APP remote access
- ❖ **Two way audio, Built in Microphone and Speaker ,with SD card slot(support up to 256GB SD card)**
- ❖ **Support audio alarm to warn intruders off**
- ❖ Lightning protection 4000V
- ❖ Strong water-proof housing, IP67
- ❖ 2 pcs IR&Warm lights, light distance 20-30 meters, Light distance:25-30M
- ❖ F1.6 2.8 mm fixed lens

Technical Specifications:

| | |
|---|--|
| Model | SST-DVC-BBC6-GR |
| Camera | |
| Image Sensor | 1/2.8" SONY IMX335 CMOS |
| Effective Pixels | 6 megapixels |
| Electronic Shutter | AUTO |
| Min. Illumination | 0.01Lux@F1.2(AGC ON), 0Lux IR on |
| Day/Night | Auto/Color/(B/W)/Timing |
| WDR | Digital WDR |
| White Balance | Auto/Manual |
| BLC | Support |
| DNR | 2D/3D DNR |
| Other | Multi-lines OSD, Motion Detection, Privacy Mask, Mirror |
| Encode | |
| Embedded Solution | SSC 30KQ |
| Video Standard | H.264/H.265 |
| Video Resolution | Main Stream: 25fps@6MP(3072*2048)/5MP(2592x1944)/4MP(2592x1520)/3MP, 30fps@1080P/720P Sub stream: 25fps@D1/VGA/360P/CIF, etc. |
| Video Bitrates | 512Kbps - 10Mbps, VBR/CBR |
| Audio Standard | G.711-u/G.711-a |
| Built-in Mic | Yes |
| OSD Overlay | Title and Time overlay |
| IR Led | |
| IR Led | 2 pcs IR&Warm lights |
| IR Distance | 25-30 M |
| Lens | |
| Focal length | F1.6 2.8 mm fixed lens |
| Optional Function | |
| Two way audio, Built in Microphone and Speaker ,with SD card slot(support up to 256GB SD card) | |
| Network Services | |
| Protocol | HTTP/RTSP/FTP/NFS/SMTP/DHCP/NTP, etc. |
| P2P | Yes |
| Web | IE , Firefox 32bit ESR, etc. |
| Media | CMS, Android, IOS |
| ONVIF | 17.06 compatible |
| General | |
| Network Port | 1-RJ45, 100Mbps, POE optional |
| Power Supply | 12 VDC ± 10% |
| Power Consumption | < 5 W |
| Operating Temp. | -30°C-(+60)°C, 10%-90%RH |