



Model: SST-IR-150-6M

6MP Human & Vehicle Detection IR 2.1mm Wide-angle Turret PoE IP Camera

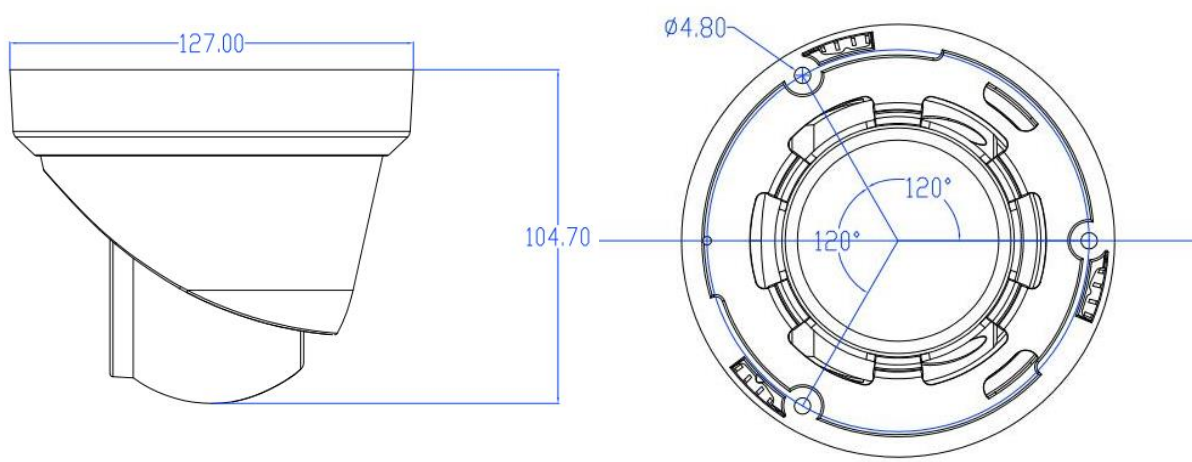

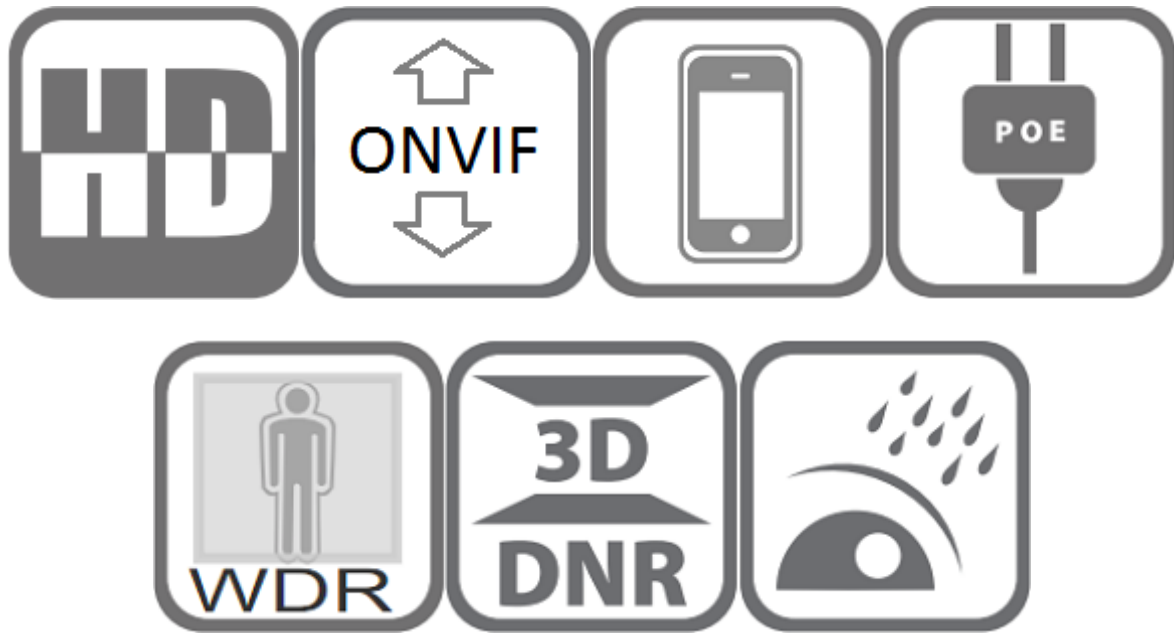

Features:

- ❖ 1/2.8" Sony IMX335 CMOS sensor
- ❖ 6MP HD resolution 3072 x 2048 output
- ❖ Ultra low illumination 0.01Lux
- ❖ Day/Night (ICR), AWB, 2D/3D-DNR, IR-CUT
- ❖ D-WDR, Motion Detection, Human/Vehicle Detection, Privacy Mask, Flip
- ❖ RTSP and Onvif 17.06 compatible
- ❖ H.265/H.264 dual-stream media server
- ❖ Easy-to-use P2P Cloud service
- ❖ Multi web browser, PC Client, mobile APP remote access
- ❖ RJ45 100mbps network port, IEEE802.3af PoE
- ❖ Lightning protection 4000V
- ❖ Strong water-proof housing, IP66
- ❖ 2 pcs Array IR LEDs, IR distance 20-30 meters
- ❖ HD 2.1 mm Wide-angle Lens

Technical Specifications:

Model	SST-IR-150-6M	
Camera		
Image Sensor	1/2.8" IMX335 CMOS	
Effective Pixels	3072(H)×2048(V)	
Electronic Shutter	AUTO/Manual: 1/10s ~ 1/10000s, shutter threshold	
Min. Illumination	0.01Lux@F1.2(AGC ON), 0Lux IR on	
Day/Night	Auto/Color/(B/W)/Timing	
WDR	Digital WDR / HDR	
White Balance	Auto/Manual	
BLC/HLC	Support	
DNR	2D/3D DNR	
Light Control	Auto/Manual, Mode switch, Brightness level, OFF, Light ON Illumination	
License Plate Mode	Yes	
Other	Multi-lines OSD, Custom Title, Privacy Mask, Flip	
Encode		
Embedded Solution	SSC377D	
Video Standard	H.264/H.265/H.265+	
Video Resolution	Main 25fps@6MP(3072x2048)/5MP(2592x1944), 30fps@4MP/3MP/1080P/720P Sub stream: 30fps@D1/VGA/360P/CIF, etc.	Stream:
Video Bitrates	512Kbps - 8Mbps, VBR/CBR	
Audio Standard	G.711-u/G.711-a/AAC	
Built-in Mic	Optional	
Smart Detection		
Motion Detection	Support	
Target Detection	Human and Vehicle Detection	
IR Led		
IR Led	2pcs Array IR LEDs	
IR Distance	20-30 M	
Lens		
Focal length	2.1mm Wide-angle Lens	
Language		
English, simplified Chinese, Chinese Traditional, Deutsch, Italian, Turkish, Polish, Korean, Japanese, Russian, Ukrainian, Persian.		
Network Services		
Protocol	HTTP/RTSP/FTP/NFSv3/SMTP/DHCP/NTP/RTMP, etc.	
P2P	Yes	
Web	IE, Firefox, Chrome, Edge, Safari, etc.	
Media	CMS, Android, IOS	
ONVIF	17.06 compatible	
General		
Network Port	1-RJ45, 100Mbps	
Power Supply	12 VDC ± 10%	

POE	802.3af/at 48V
Power Consumption	< 8 W
Operating Temp.	-30°C-(+60)°C, 10%-90%RH