



**Model: SST-DUAL-POL-2M**

**2MP Red&Blue flashing Two-way Audio PoE IP camera**

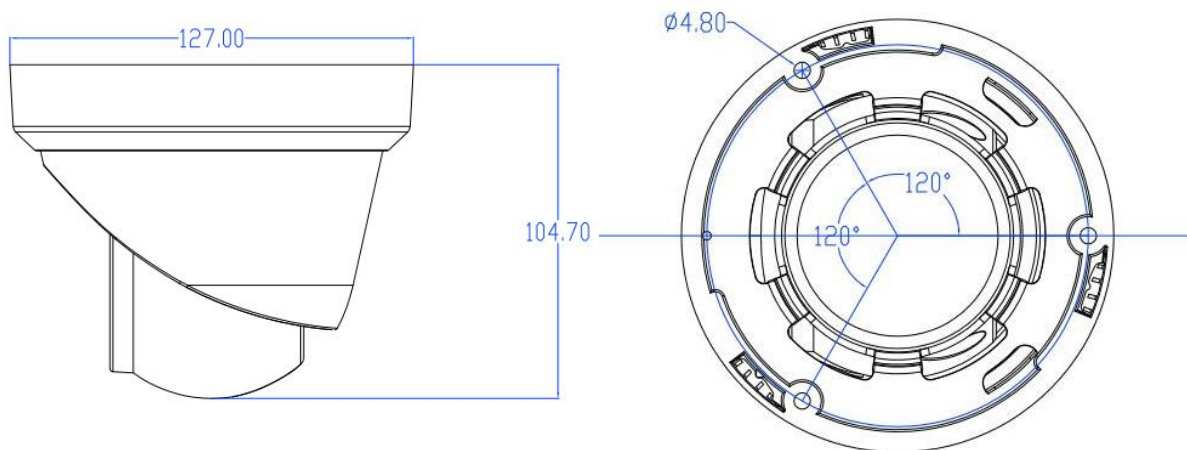

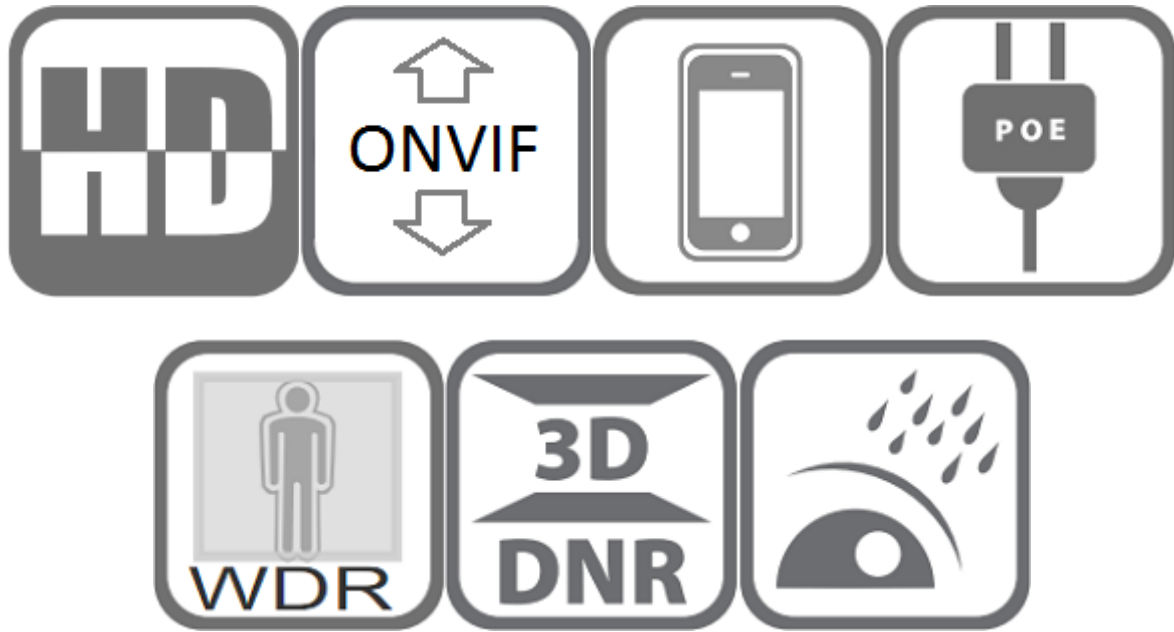

## Features:

- ❖ 1/2.8" Sony IMX307 CMOS sensor
- ❖ Full HD resolution 1920 x 1080P
- ❖ Ultra low illumination 0.001Lux
- ❖ Day/Night (ICR), AWB, 2D/3D-DNR, IR-CUT
- ❖ D-WDR, Motion Detection, Human Detection, Privacy Mask, Flip
- ❖ RTSP and Onvif 17.06 compatible
- ❖ H.265/H.264 dual-stream media server
- ❖ Easy-to-use P2P Cloud service
- ❖ Multi web browser, PC Client, mobile APP remote access
- ❖ RJ45 100mbps network port, IEEE802.3af PoE
- ❖ Lightning protection 4000V
- ❖ Strong water-proof housing, IP67
- ❖ 1pc IR & blue flashing&1pc Warm-light Led
- ❖ HD 2.8mm F1.0 fixed lens
- ❖ Two-Way audio, SD slot,Reset button

## Technical Specifications:

<b>Model</b>	<b>SST-DUAL-POL-2M</b>
<b>Camera</b>	
Image Sensor	1/2.8" SONY IMX307 CMOS
Effective Pixels	1920 (H) x 1080 (V)
Electronic Shutter	AUTO, 1/10s ~ 1/100000s
Min. Illumination	0.001Lux@F1.2(AGC ON), 0Lux IR on
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR
White Balance	Auto/Manual
BLC/HLC	Support
DNR	2D/3D DNR
Light Control	Auto/Manual, Mode switch, Brightness level, OFF, Light ON Illumination
License Plate Mode	Yes
Other	Multi-lines OSD, Privacy Mask, Flip, Reset
<b>Encode</b>	
Embedded Solution	SSC335
Video Standard	H.264/H.265/H.265+
Video Resolution	Main stream: 1080P@30fps , 720P@30fps Sub stream: D1/VGA/360P@30fps
Video Bitrates	32Kbps - 5Mbps, VBR/CBR
Audio Standard	G.711-u/G.711-a/AAC
Built-in Mic	Yes
Built-in Speaker	Yes Two-way audio
Memory Slot	Yes, maximum 512GB
<b>Smart Detection</b>	
Motion Detection	Support
Target Detection	Human Detection
<b>Led</b>	
Led	1pc IR & blue flashing&1pc Warm-light Led
Distance	20-30 M
<b>Lens</b>	
Focal length	F1.0 2.8mm fixed
<b>Language</b>	
English, simplified Chinese, Chinese Traditional, Deutsch, Italian, Turkish, Polish, Korean, Japanese, Russian, Ukrainian, Persian.	
<b>Network Services</b>	
Protocol	HTTP/RTSP/FTP/SMTP/DHCP/NTP/RTMP, etc.
P2P	Yes
Web	IE, Firefox, Chrome, Edge, Safari, etc.
Media	CMS, Android, IOS
ONVIF	17.06 compatible
<b>General</b>	
Network Port	1-RJ45, 100Mbps
Power Supply	12 VDC ± 10%

POE	802.3af/at 48V
Power Consumption	< 8 W
Operating Temp.	-20°C-(+60)°C, 10%-90%RH