


2MP 4-IN-1 10X IR PTZ Bullet Camera

Model: SST-4N1-PTZ1-2M

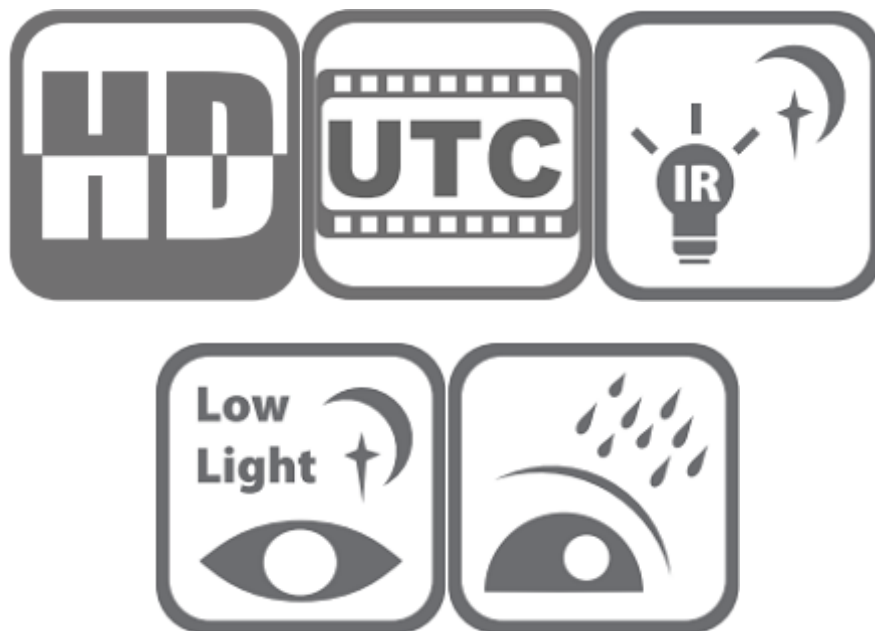

Features:

- ❖ 4-in-1 CVI / TVI / AHD / CVBS

- ❖ 1/2.9" Sony Exmor CMOS sensor
- ❖ Full HD resolution 1920 x 1080P
- ❖ Ultra low illumination 0.01Lux
- ❖ 10X optical zoom
- ❖ PTZ UTC control
- ❖ Day/Night (ICR), AWB, AGC, BLC, 2D/3D-DNR
- ❖ WDR, Smart IR, Motion Detection, Privacy Mask, Mirror
- ❖ Lightning protection 4000V
- ❖ Strong water-proof housing, IP66
- ❖ 4 pcs High-power 850nm Array IR Leds, IR distance 60-80 meters
- ❖ 5.1 – 51 mm incorporated Auto Focus lens

Technical Specifications:

| | |
|----------------------|--|
| Model | SST-4N1-PTZ1-2M |
| Camera | |
| Image Sensor | 1/2.9" Sony Exmor CMOS |
| Effective Pixels | 1920(H)×1080 (V) |
| Electronic Shutter | AUTO, 1/25s ~ 1/100000s |
| Min. Illumination | 0.01Lux@F1.6(AGC ON), 0Lux IR on |
| Day/Night | Auto/Color/(B/W) |
| WDR | Digital WDR |
| White Balance | Auto |
| AGC | Support |
| DNR | 2D/3D DNR, multi-levels adjustable |
| OSD Menu | Support UTC control |
| Other | Privacy Mask, Mirror, Flip |
| IR Led | |
| IR Led | 4 pcs High-power 850nm Array IR Leds |
| IR Distance | 60-80 M |
| Lens | |
| Focal length | 5.1 -51 mm AF lens |
| Zoom | 10x optical zoom |
| PTZ | |
| Control Port | RS485 or UTC |
| PTZ Protocol | Pelco-D, Pelco-P, etc. |
| Pan/Tilt Range | Pan: 0° ~ 300°; Tilt: -5° ~ 60° |
| Preset Point | 255 |
| Manual Control Speed | Pan: 0.5° ~12° /s; Tilt: 0.51° ~12° /s |
| Power down recovery | Support |
| General | |
| Video Output | 1-BNC AHD 1080P |
| Power Supply | 12 VDC ± 10% |
| Power Consumption | < 15 W |
| Operating Temp. | -30°C-(+60)°C, 10%-90%RH |