

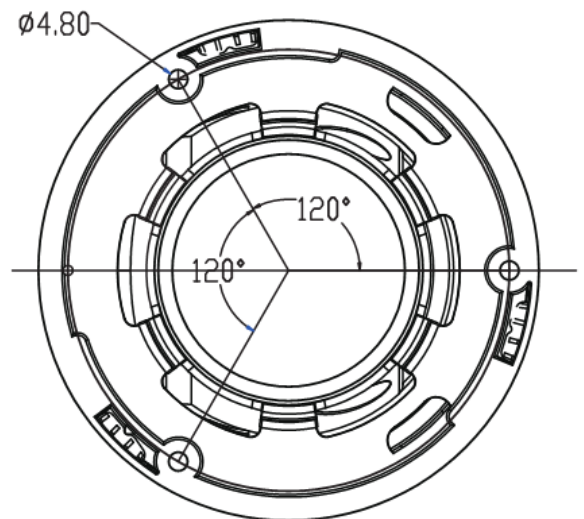


6MP Full Color Red & Blue Two way audio Turret IP POE Camera

Model: SST-DUAL-POL-6M

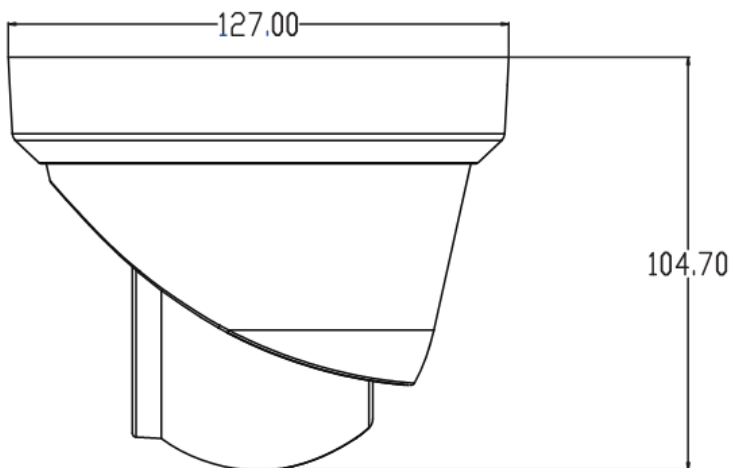

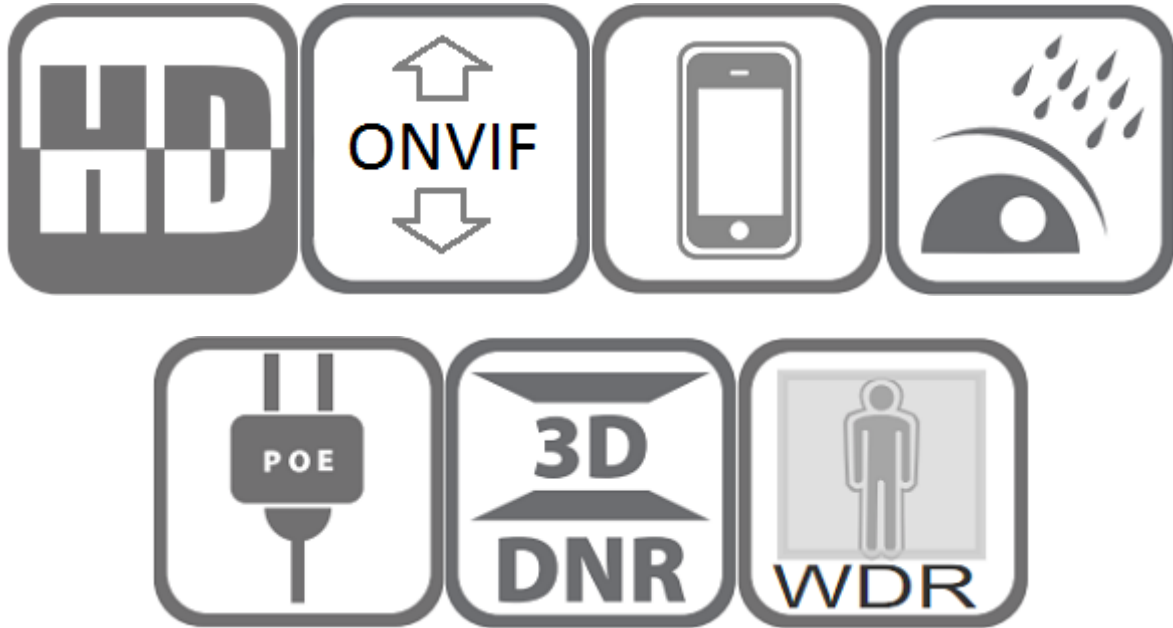

Features:

- ❖ 1/2.8" Sony IMX335 CMOS sensor
- ❖ Full HD resolution 3072x2048P
- ❖ Ultra low illumination 0.01Lux
- ❖ Day/Night (ICR), AWB, AGC, BLC, 2D/3D-DNR, IR-CUT
- ❖ D-WDR, Motion Detection, Privacy Mask, Mirror
- ❖ RTSP and Onvif 17.06 compatible
- ❖ H.265/H.264 dual-stream media server
- ❖ Easy-to-use P2P Cloud service
- ❖ Multi web browser, PC Client, mobile APP remote access
- ❖ Lightning protection 4000V
- ❖ RJ45 100mbps network port, IEEE802.3af PoE
- ❖ Strong water-proof housing, IP67
- ❖ 1PC Warm light LED + 1PC red and blue flashlight LED, Light distance:25-30M
- ❖ HD 2.8mm F1.0 lens
- ❖ Human body/vehicle detection
- ❖ Two-way Audio & SD slot
- ❖ [24/7 Colorful Imaging](#)

Technical Specifications:

Model	SST-DUAL-POL-6M
Camera	
Image Sensor	1/2.8" Sony IMX335 CMOS
Effective Pixels	3072(H)×2048(V)
Electronic Shutter	AUTO/Manual: 1/10s ~ 1/10000s, shutter threshold
Min. Illumination	0.01Lux@F1.2(AGC ON), 0Lux IR on
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR / HDR
White Balance	Auto/Manual
BLC/HLC	Support
DNR	2D/3D DNR
Light Control	Auto/Manual, Mode switch, Brightness level, OFF, Light ON Illumination
License Plate Mode	Yes
Other	Multi-lines OSD, Custom Title, Privacy Mask, Flip, Reset button
Encode	
Embedded Solution	SSC377D
Video Standard	H.264/H.265/H.265+
Video Resolution	Main Stream: 25fps@6MP(3072x2048)/5MP(2592x1944), 30fps@4MP/3MP/1080P/720P Sub stream: 30fps@D1/VGA/360P/CIF, etc.
Video Bitrates	32Kbps - 8Mbps, VBR/CBR
Audio Standard	G.711-u/G.711-a
Built-in Mic	Yes, Audio Echo Cancellation
Built-in Speaker	Yes, Two-way audio
Memory Slot	Yes, maximum 512GB
OSD Overlay	Title and Time overlay
LED	
Leds	1PC Warm light LED + 1PC red and blue flashlight LED
Light Distance	25-30 M
Lens	
Focal length	HD 2.8mm F1.0 lens
Language	
Netherlands, English, simplified Chinese, Chinese Traditional, Deutsch, Italian, Turkish, Polish, Korean, Japanese, Russian, Ukrainian, Persian.	
Network Services	
Protocol	HTTP/RTSP/FTP/NFS/SMTP/DHCP/NTP, etc.
P2P	Yes
Web	IE, Firefox, Chrome, Edge, Safari, etc.
Media	CMS, Android, IOS
ONVIF	17.06 compatible
General	
Network Port	1-RJ45, 100Mbps
Power Supply	12 VDC ± 10%

POE	802.3af/at 48V
Power Consumption	< 8 W
Operating Temp.	-30°C-(+60)°C, 10%-90%RH