



Model: SST-COL-B3-5M

Outdoor use 5MP Ultra Color View POE bullet IP Camera

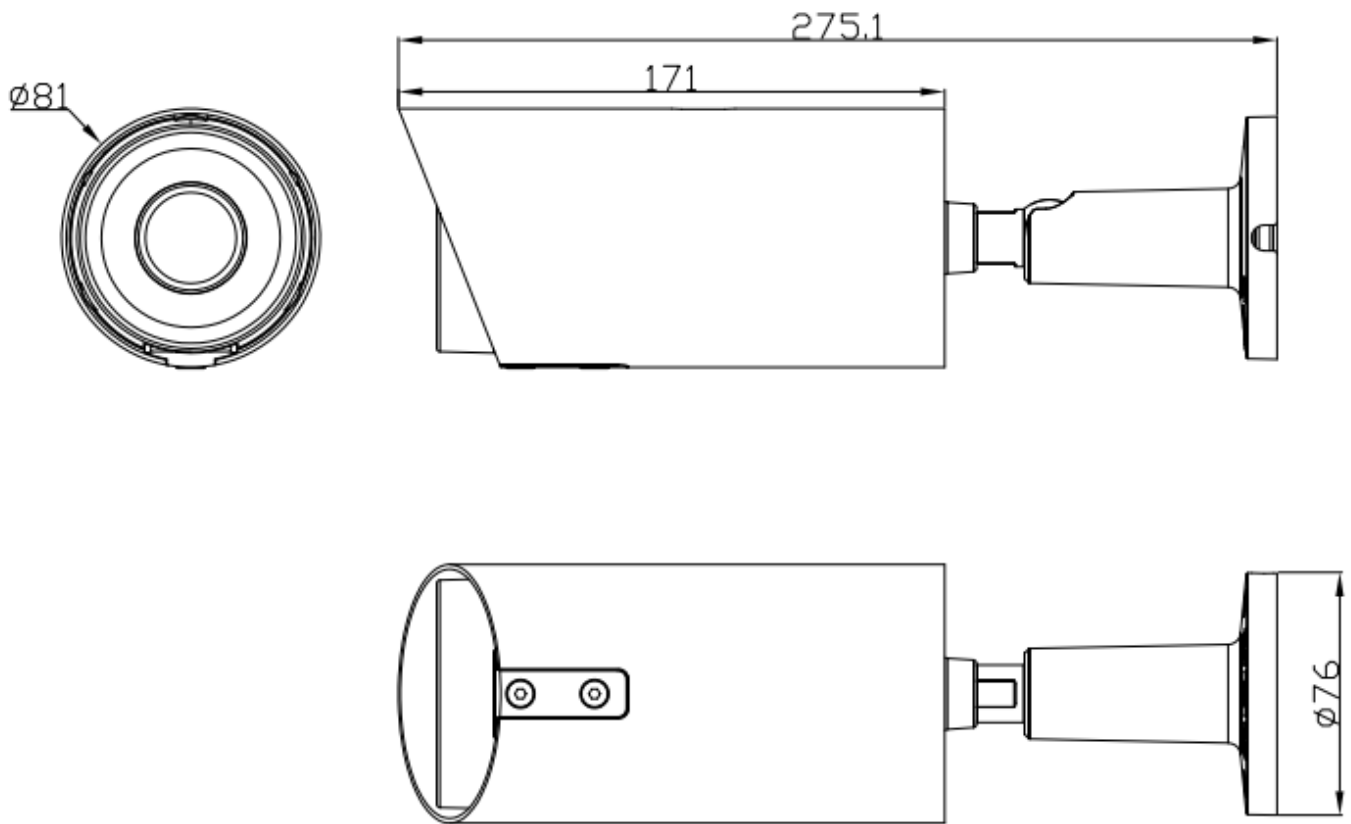

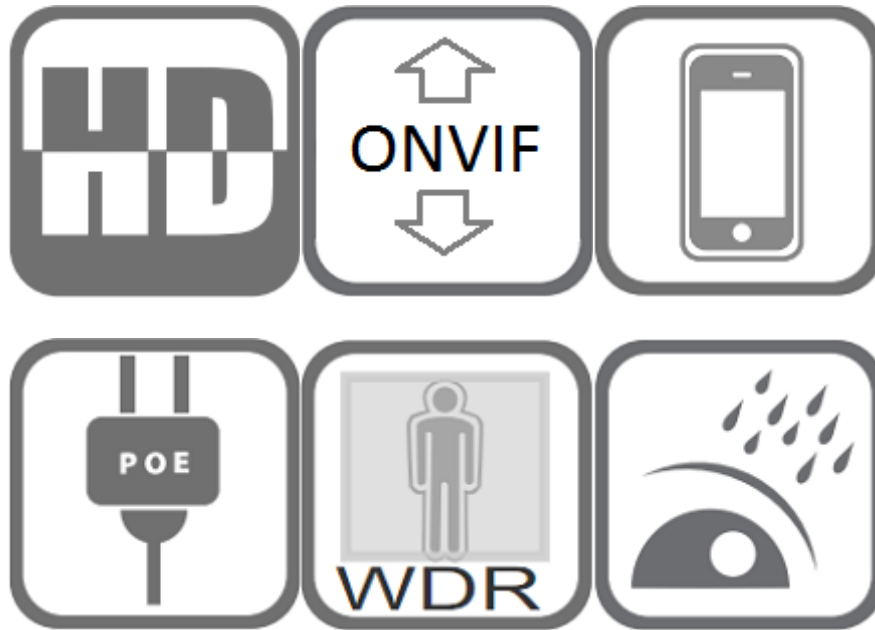

Features:

- 1/1.8" CMOS sensor
- 5MP resolution 2880 x 1620P (16:9)
- Low illumination 0.001Lux
- Day/Night, AWB/MWB, BLC, HLC, 2D/3D-DNR, Shutter,
- Multiply Style OSD Overlay, Motion Detection, Privacy Mask
- RTSP and Onvif 17.06 compatible with many third-party NVR
- H.264/H.265 dual-stream media server
- Easy-to-use P2P Cloud service
- Support user authentication, video data encryption
- Multiply WEB browser IE, Firefox 32bit ESR, PC Client, Mobile APP remote access
- RJ45 100mbps network port, IEEE802.3af PoE
- Lightning protection 4000V
- Strong water-proof housing, IP67
- 4PCS Soft & Warm Supplemental Light,Light distance:30-40M
- 4mm F1.0 true starlight lens
- Built in microphone and SD card slot optional

Technical Specifications:

Model	SST-COL-B3-5M
Camera	
Image Sensor	1/1.8" SC450AI CMOS
Effective Pixels	5 megapixels
Electronic Shutter	AUTO/Manual: 1/10s ~ 1/10000s, shutter threshold

Min. Illumination	0.001Lux@F1.0(AGC ON)
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR
White Balance	Auto/Manual
BLC /HLC	Support
DNR	2D/3D DNR
Light Control	Auto/Manual, Mode switch, Brightness level, OFF, Light ON Illumination
License Plate Mode	Yes
Other	Multi-lines OSD, Privacy Mask, Flip, SD Slot, Reset
Encode	
Video Standard	H.264/H.265/H.265+
Video Resolution	MainStream:20fps@5MP(2880x1620),25fps@4MP(2688x1520),30fps@3MP(2304x1296)/1080P/720P Sub stream: 30fps@VGA(640x480)/CIF@30fps
Video Bitrates	512Kbps - 8Mbps, VBR/CBR
Audio Standard	G.711-u/G.711-a/AAC
Built-in Mic	Yes
Built-in Speaker	N/A
SD card slot	Yes
Led	
Led	4PCS Soft & Warm Supplemental Light
Distance	30-40 M
Lens	
Focal length	4mm F1.0 true starlight lens
FOV(1/1.8)	H:92° V:56° D:114°
Language	
Netherlands,English, simplified Chinese, Chinese Traditional, Deutsch, Italian, Turkish, Polish, Korean, Japanese, Russian, Ukrainian, Persian.	
Smart Detection	
Motion Detection	Support
Target Detection	Human, vehicle, non-motor vehicle
Network Services	
Protocol	HTTP/RTSP/DHCP/NTP, etc.
P2P	Yes
Web	IE, Firefox, Chrome, Edge, Safari, etc.
Media	CMS, Android, IOS
ONVIF	17.06 compatible
General	
Network Port	1-RJ45, 100Mbps, POE 802.3af/at 48V
Power Supply	12 VDC ± 10%
Power Consumption	< 8 W
Operating Temp.	-30°C-(+60)°C, 10%-90%RH