

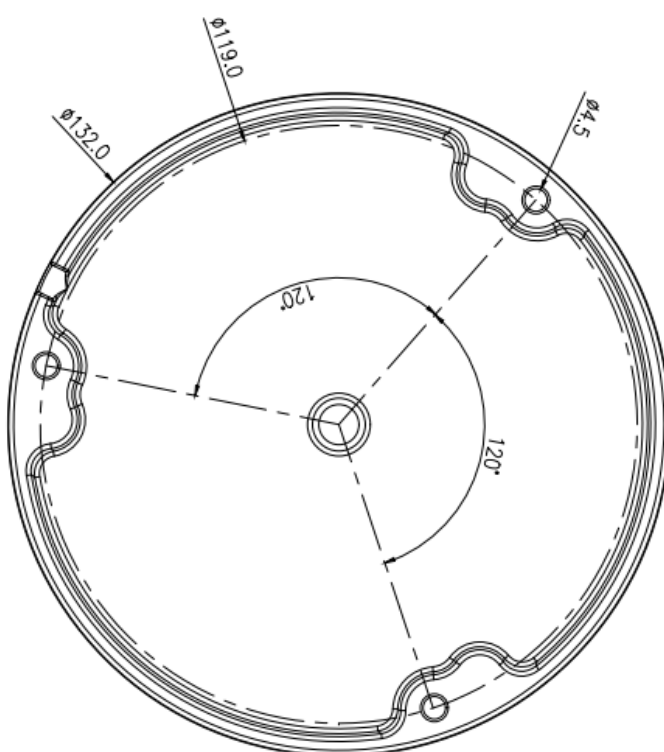


Model: SST-IP-DMIR-5M

5MP@30fps HD motorized zoom lens Vandalproof dome MULTIFUNCTION POE

IP camera

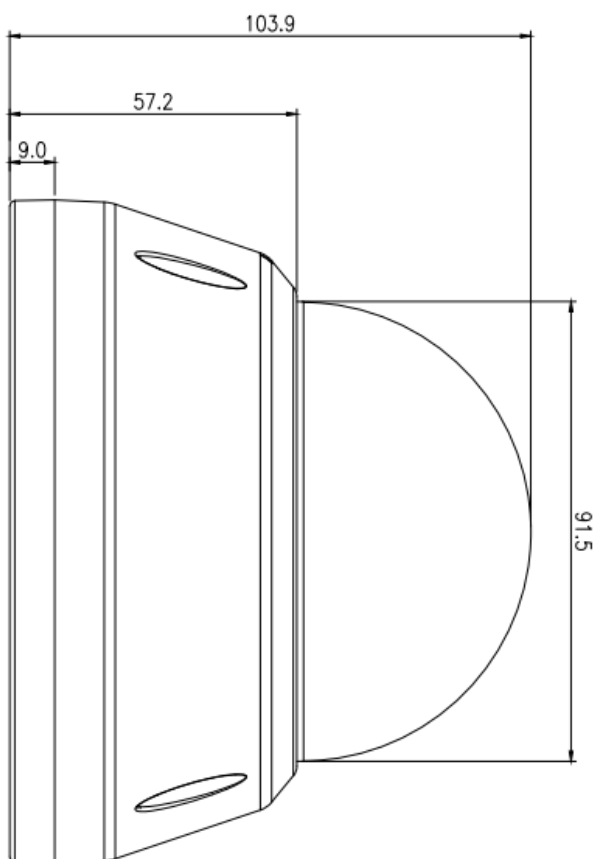

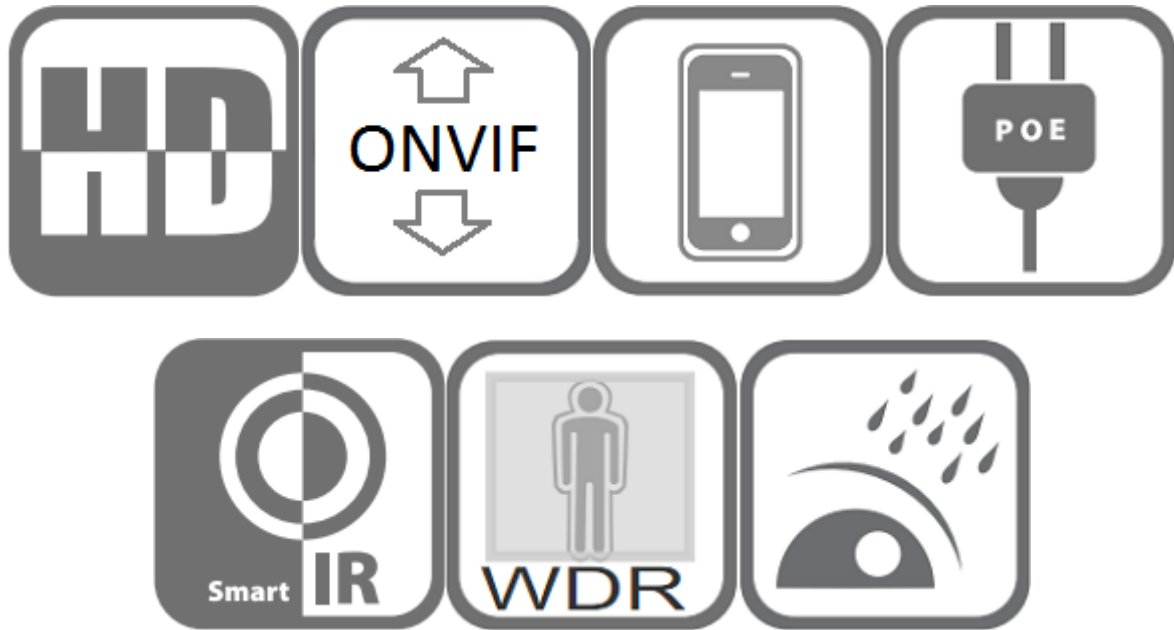

Features:

- 1/2.8" Sony CMOS sensor
- Full HD 5MP resolution 2592 x 1944P
- Low illumination 0.01Lux
- Day/Night, AWB/MWB,BLC, HLC, 2D/3D-DNR,Shutter, IR-CUT
- D-WDR,Mirror, rotate, Defogging
- Multiply Style OSD Overlay,Motion Detection, Privacy Mask
- RTSP and Onvif 17.06 compatible with many third-party NVR
- H.264/H.265 dual-stream media server
- Easy-to-use P2P Cloud service
- Support user authentication, video data encryption
- Support Alarm Snapshot to Email and FTP
- Multiply WEB browser IE,Firefox 32bit ESR, PC Client, Mobile APP remote access
- RJ45 100mbps network port, IEEE802.3af PoE
- Lightning protection 4000V
- Strong water-proof housing, IP66 and IK10 vandalproof
- 4pcs IR Array Leds, IR distance 30-35 meters
- 2.7-13.5mm 5X motorized zoom and AF lens
- With Audio I/O,Alarm I/O ,With SD card slot , support up to 512GB Micro SD card

Technical Specifications:

Model	SST-IP-DMIR-5M
Camera	
Image Sensor	1/2.8" Sony CMOS
Effective Pixels	5 megapixels
Electronic Shutter	AUTO, 1/25s ~ 1/100000s
Min. Illumination	0.01Lux@F1.2(AGC ON), 0Lux IR on
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR
White Balance	Auto/Manual
BLC /HLC	Support
DNR	2D/3D DNR
License Plate Mode	Yes
Other	Human body and Vehicle detection,AGC,Motion Detection,Privacy Mask,Flip,Rotate,,OSD overlay
Encode	
Video Standard	H.264/H.265
Video Resolution	Main Stream:30fps@5MP(2592*1944) , 30fps@4MP(2592*1520) Sub Stream: D1/VGA(640x480)/360P/QVGA@30fps Third stream:720P/CIF@10fps
Video Bitrates	512Kbps - 8Mbps, VBR/CBR
Audio Standard	G.711-u/G.711-a/AAC
Audio I/O	1/1
Alarm I/O	1/1
Built-in Mic	N/A
Built-in Speaker	N/A
SD card slot	With SD card slot , support up to 512GB Micro SD card
OSD Overlay	Title and Time overlay ,custom color adjustable
IR Led	
IR Led	4pcs IR Array Leds
IR Distance	30-35 M
Lens	
Focal length	2.7-13.5mm 5X motorized zoom and AF lens
Language	
English, simplified Chinese, Chinese Traditional, Deutsch, Italian, Turkish, Polish, Korean, Japanese, Russian, Ukrainian, Persian.	
Network Services	
Protocol	HTTP/RTSP/FTP/SMTP/DHCP/NTP/NFS, etc.
P2P	Yes
Web	IE , Firefox,Edge, Google Chrome etc.
Media	CMS, Android, IOS
ONVIF	17.06 compatible
General	
Network Port	1-RJ45, 100Mbps, POE
Power Supply	12 VDC ± 10%,POE

Power Consumption	< 8 W
Operating Temp.	-30°C-(+60)°C, 10%-90%RH