


Model: SST-PTZ-V3-6M

3-inch 6MP 5X Two Way Audio Dual-Light IP PTZ Speed Dome Camera



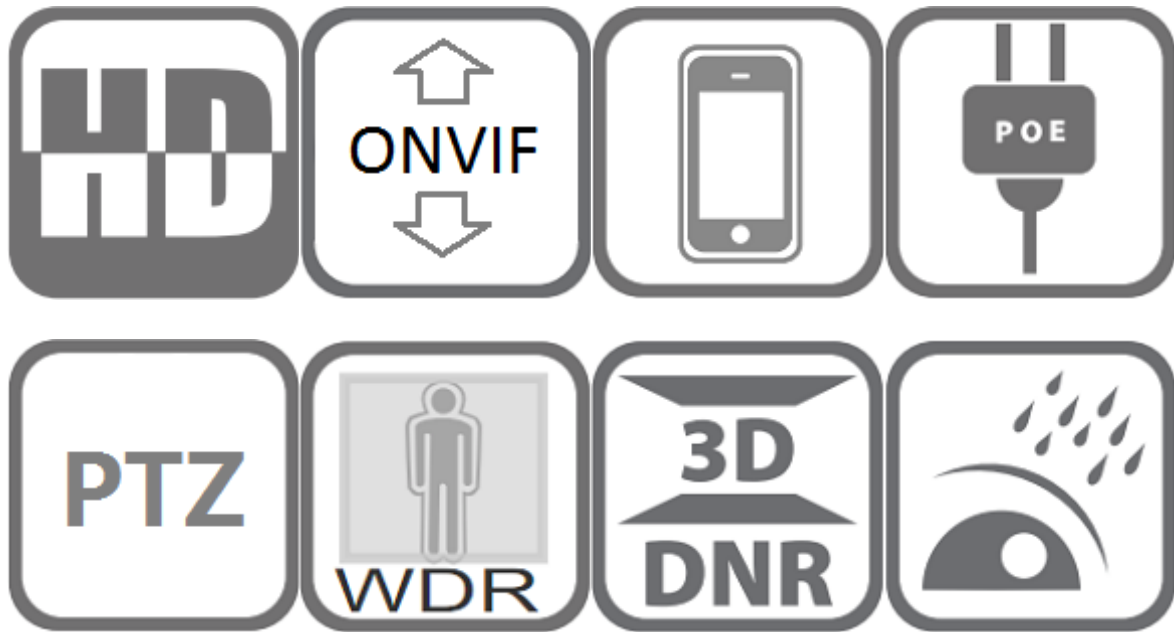

Features:

- 1/2.8" Sony CMOS sensor
- 6 resolution 3072x2048P
- Low illumination 0.01Lux
- 5x optical zoom lens
- Smart Human and Vehicle Detection Alarm
- Built-in Mic and speaker, two-way audio
- Day/Night, AWB/MWB, BLC, HLC, 2D/3D-DNR, Shutter, IR-CUT
- D-WDR, Flip, Defogging
- Multiply Style OSD Overlay, Motion Detection, Privacy Mask
- RTSP and Onvif 17.06 compatible with many third-party NVR
- H.264/H.265 stream media server
- Easy-to-use P2P Cloud service
- Support user authentication, video data encryption
- Support Alarm Snapshot to Email and FTP
- Multiply WEB browser IE, Firefox, Chrome, Edge, Safari
- Free PC Client, Mobile APP remote access
- RJ45 100mbps network port, IEEE802.3af 48v PoE
- Lightning protection 4000V
- Strong water-proof housing IP66
- 6pcs Array IR Leds, IR Distance:50-60M
- 2PCS Soft & Warm Supplemental Light, Light Distance: 20M
- Support audio alarm to warn intruders off
- Support warm light on and colorful imaging when detect human body and vehicle

Technical Specifications:

Model	SST-PTZ-V3-6M
Camera	
Image Sensor	1/2.8" Sony CMOS
Effective Pixels	6 megapixels
Electronic Shutter	AUTO, 1/25s ~ 1/100000s
Min. Illumination	0.01Lux@F1.2(AGC ON), 0Lux IR on
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR , HDR
White Balance	Auto/Manual
AGC/BLC/HLC	Support
DNR	2D/3D DNR
Other	Multi-lines OSD, Motion Detection, Privacy Mask, Mirror
Encode	
Video Standard	H.265/H.264
Video Resolution	Main Stream: 25fps@6MP(3072x2048)/5MP(2592x1944), 30fps@4MP/3MP/1080P/720P Sub stream: 30fps@D1/VGA/360P/CIF, etc.
Video Bitrates	512Kbps - 8Mbps, VBR/CBR
Audio Standard	G.711-u/G.711-a
Two-Way Audio	Built-in Mic and Speaker
Smart Event	Human Detection, Vehicle Detection Motion Detection
Micro-SD Slot	Max.512G
IR&warm light Led	
IR Led	6pcs array IR Led
Warmlight	2pcs Warmlight LEDs
Distance	50-60M (IR); 20M (Warm light)
Lens	
Focal length	2.7-13.5mm
Zoom	5x optical zoom
Function	
High power PoE	
PTZ	
Pan/Tilt Range	Pan: 0° ~ 355°; Tilt: 0° ~ 92°
Preset Point	7
Control Speed	Pan: 0.5° ~20° /s; Tilt: 0.5° ~20° /s
A-B Scanning	Support
Auto Cruising	Support 8 groups
Power on Action	Preset/Scan/Cruise
Power-off Recovery	Support
Network Services	
Protocol	HTTP/RTSP/FTP/SMTP/DHCP/NTP/NFS/RTMP, etc.
P2P	Yes
Web	IE, Firefox, Chrome, Edge, Safari

Media	CMS, Android, IOS
ONVIF	17.06 compatible
General	
Network Port	1-RJ45, 100Mbps, PoE 48V in
Power Supply	12 VDC \pm 10% 2A
Power Consumption	< 20 W
Operating Temp.	-30°C-(+60)°C, 10%-90%RH
Size	22.6*19.0*13.3 cm
Weight	1 kg