

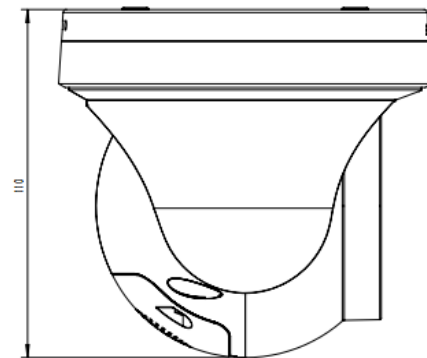


**Model: SST-PTZ-V7-6M**

---

**6MP 5X Dual-Light Siren and Voice Alarm Turret PTZ IP Camera**

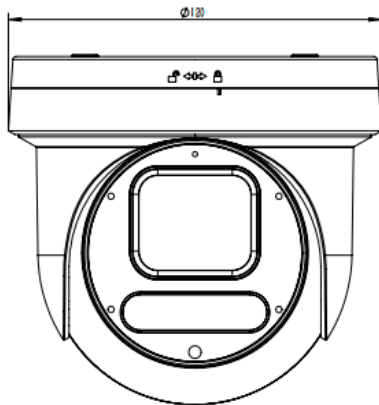

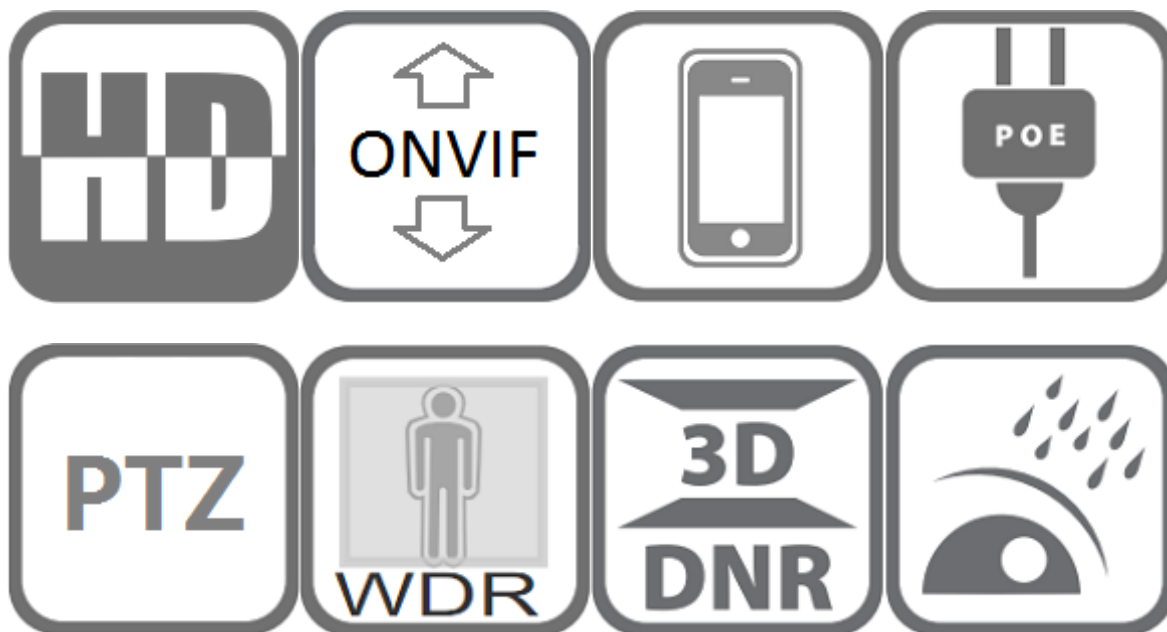

## Features:

- 1/2.8" Sony CMOS sensor
- 6MP resolution 3072x2048P
- Low illumination 0.01Lux
- 5x optical zoom lens
- Smart Human and Vehicle Detection Alarm
- Built-in Mic and speaker, two-way audio
- Siren and voice alarm, flash alarm
- Day/Night, AWB/MWB, BLC, HLC, 2D/3D-DNR, Shutter, IR-CUT
- D-WDR, Flip, Defogging
- Multiply Style OSD Overlay, Motion Detection, Privacy Mask
- RTSP and Onvif 17.06 compatible with many third-party NVR
- H.264/H.265 stream media server
- Easy-to-use P2P Cloud service
- Support user authentication, video data encryption
- Support Alarm Snapshot to Email and FTP
- Multiply WEB browser IE, Firefox, Chrome, Edge, Safari
- Free PC Client, Mobile APP remote access
- RJ45 100mbps network port, IEEE802.3af 48v PoE
- Lightning protection 4000V
- Strong metal water-proof housing, IP66
- 4 pcs Array IR and warm-light LEDs
- IR distance 40 meters, warm-light distance 30 meters
- Reset key, two-way audio, Micro-SD slot (Max. 512G)

## Technical Specifications:

<b>Model</b>	<b>SST-PTZ-V7-6M</b>
<b>Camera</b>	
Image Sensor	1/2.8" Sony CMOS
Effective Pixels	6 megapixels
Electronic Shutter	AUTO, 1/25s ~ 1/100000s
Min. Illumination	0.01Lux@F1.2(AGC ON), 0Lux IR on
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR , HDR
White Balance	Auto/Manual
AGC/BLC/HLC	Support
DNR	2D/3D DNR
Other	Multi-lines OSD, Motion Detection, Privacy Mask, Mirror
<b>Encode</b>	
Video Standard	H.265/H.264
Video Resolution	Main Stream: 25fps@6MP(3072x2048)/5MP(2592x1944), 30fps@4MP/3MP/1080P/720P Sub stream: 30fps@D1/VGA/360P/CIF, etc.
Video Bitrates	512Kbps - 8Mbps, VBR/CBR
Audio Standard	G.711-u/G.711-a
Two-Way Audio	Built-in Mic and Speaker
Smart Event	Human Detection, Vehicle Detection Motion Detection
Micro-SD Slot	Max.512G
Reset Key	Yes
<b>IR&amp;warm light Led</b>	
Led	4pcs array IR&warm Led
Distance	40m (IR), 30m (warm light)
<b>Lens</b>	
Focal length	2.7-13.5 mm AF
Zoom	5x optical zoom
<b>PTZ</b>	
Pan/Tilt Range	Pan: 0° ~ 280°; Tilt: 0° ~ 90°
Preset Point	10
Control Speed	Pan: 15° /s; Tilt: 15° /s
Guard Position	Support
Power-off Recovery	Support
<b>Network Services</b>	
Protocol	HTTP/RTSP/FTP/SMTP/DHCP/NTP/NFS/RTMP, etc.
P2P	Yes
Web	IE, Firefox, Chrome, Edge, Safari
Media	CMS, Android, IOS
ONVIF	17.06 compatible
<b>General</b>	
Network Port	1-RJ45, 100Mbps, PoE 48V in

Power Supply	12 VDC $\pm$ 10% 2A
Power Consumption	< 15 W
Operating Temp.	-30°C-(+60)°C, 10%-90%RH
Size	$\Phi$ 120(mm) $\times$ 110(mm)
Weight	0.68kg