



Model: SST-B-PTZ-2M


2MP 4X Optical Zoom 2-Way Audio Mini Bullet PTZ IP Camera

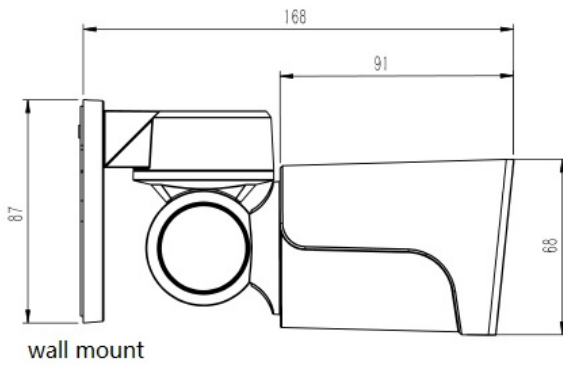


wall mount

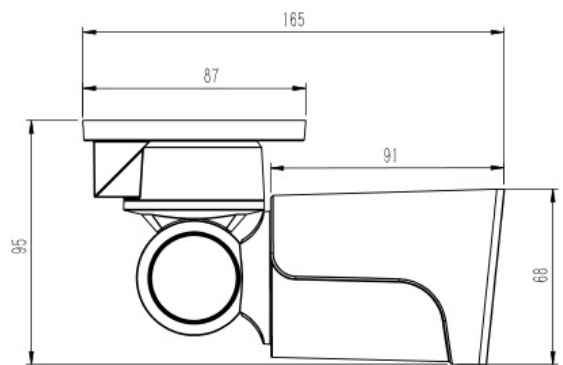

ceiling mount

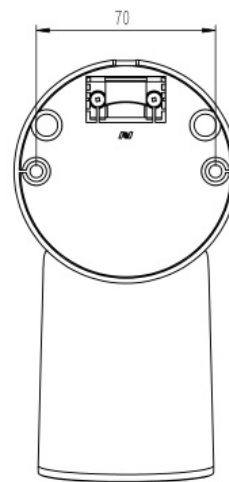

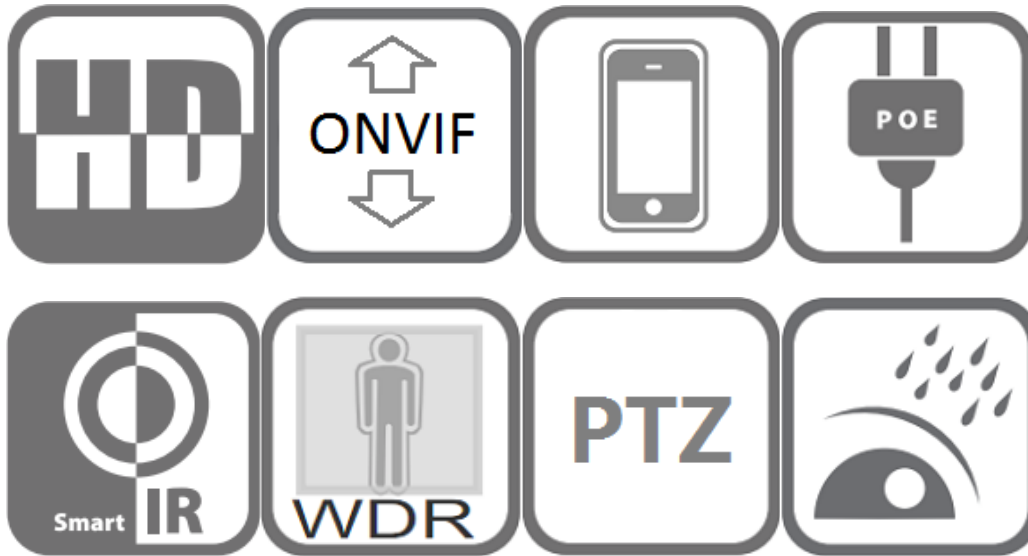

Features:

- 1/2.8" Sony STARVIS CMOS sensor
- FHD resolution 1920 x 1080P real-time
- Low illumination 0.001Lux
- Day/Night (ICR), AWB, 2D/3D-DNR, IR-CUT
- D-WDR, Motion Detection, Privacy Mask, Mirror, rotate
- RTSP and Onvif 2.6 compatible
- H.265/H.264 dual-stream media server
- Easy-to-use P2P Cloud service
- Multi web browser, PC Client, mobile APP remote access
- Optional customization Lens/Audio/POE, etc.
- Lightning protection 4000V
- Strong water-proof housing, IP65
- 6 pcs SMD Array IR Leds, IR distance 30-40 meters
- Network PTZ control , 4 times optical zoom
- HD 2.8– 12 mm Auto Focus Motorized lens

Technical Specifications:

Model	SST-B-PTZ-2M
Camera	
Image Sensor	1/2.8" Sony IMX307 CMOS
Effective Pixels	1945 (H) x 1097 (V)
Electronic Shutter	AUTO, 1/25s ~ 1/100000s
Min. Illumination	0.01Lux@F1.2(AGC ON), 0Lux IR on
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR
White Balance	Auto
Other	AGC,2/3 DNR,Motion Detection, Privacy Mask, Mirror, Flip
Encode	
Embedded Solution	MC335
Video Standard	H.265/H.264
Video Resolution	Main stream: 1080P/720P@30fps Sub Stream: D1/VGA(640x480)/360P/QVGA@30fps, etc.
Video Bitrates	32Kbps - 8Mbps, VBR/CBR
Smart Detection	Human Detection Motion Detection
IR Led	
IR Led	6 pcs SMD Array IR Leds
IR Distance	30-40 M
Lens	
Focal length	2.8-12 mm AF Motorized lens
Zoom	4x optical zoom
PTZ	
Pan/Tilt Range	Pan: 0° ~ 180°; Tilt: 0° ~ 55°
Manual Control Speed	Pan: 0.5° ~20° /s; Tilt: 0.5° ~10° /s
Other Function	
POE	Internal POE
Two-Way Audio	Built-in Mic and Speaker
Reset	/
Network Services	
Protocol	RTSP/FTP/DHCP/DDNS/NTP/SMTP/NFS
P2P	Yes
Web	IE , firefox 32bit ESR
Media	CMS, Android, IOS
ONVIF	17.06 compatible
General	
Network Port	1-RJ45, 100Mbps, POE optional
Power Supply	12 VDC ± 10%
Power Consumption	< 5 W
Operating Temp.	-30°C-(+60)°C, 10%-90%RH