



Model: SST-PTZ-V8-6M

6MP 3X Optical Zoom Mini Dome PTZ IP Camera

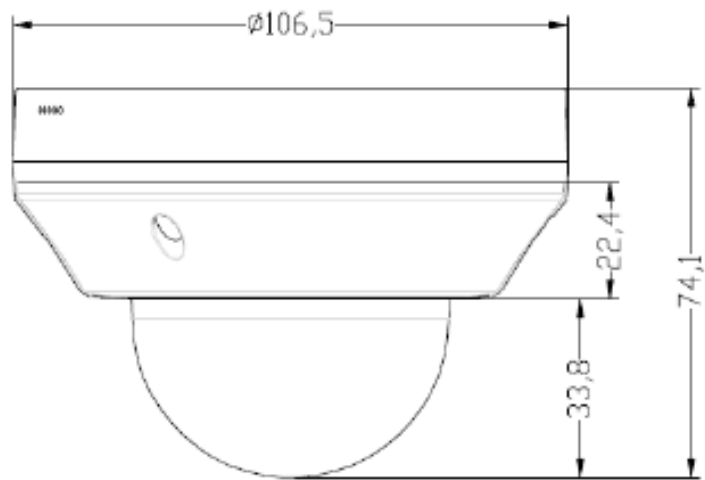

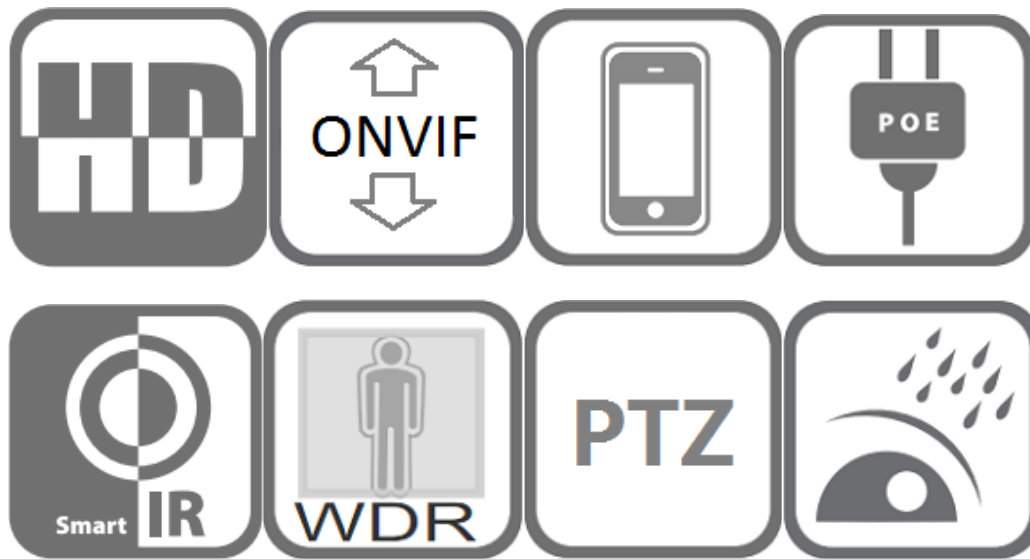

Features:

- 1/2.8" Sony CMOS sensor
- 6 resolution 3072x2048P
- Low illumination 0.01Lux
- Network PTZ control , 3x optical zoom
- Smart Human and Vehicle Detection Alarm
- Built-in Mic and speaker, two-way audio
- Day/Night, AWB/MWB, BLC, HLC, 2D/3D-DNR, Shutter, IR-CUT
- D-WDR, Flip, Defogging
- Multiply Style OSD Overlay, Motion Detection, Privacy Mask
- RTSP and Onvif 17.06 compatible with many third-party NVR
- H.264/H.265 stream media server
- Easy-to-use P2P Cloud service
- Support user authentication, video data encryption
- Support Alarm Snapshot to Email and FTP
- Multiply WEB browser IE, Firefox, Chrome, Edge, Safari
- Free PC Client, Mobile APP remote access
- RJ45 100mbps network port, IEEE802.3af 48v PoE
- Lightning protection 4000V
- 3PCS SMD Array IR LEDs, IR Distance 20M
- 2.8-8mm Motorized Auto Focus lens
- 350° horizontal rotation, 90° vertical range
- Horizontal speed 80°/sec
- Built-in Microphone

Technical Specifications:

Model	SST-PTZ-V8-6M
Camera	
Image Sensor	1/2.8" Sony CMOS
Effective Pixels	6 megapixels
Electronic Shutter	AUTO, 1/25s ~ 1/100000s
Min. Illumination	0.01Lux@F1.2(AGC ON), 0Lux IR on
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR , HDR
White Balance	Auto/Manual
AGC/BLC/HLC	Support
DNR	2D/3D DNR
Other	Multi-lines OSD, Motion Detection, Privacy Mask, Mirror
Encode	
Video Standard	H.265/H.264
Video Resolution	Main Stream: 25fps@6MP(3072x2048)/5MP(2592x1944), 30fps@4MP/3MP/1080P/720P Sub stream: 30fps@D1/VGA/360P/CIF, etc.
Video Bitrates	512Kbps - 8Mbps, VBR/CBR
Audio Standard	G.711-u/G.711-a
IR Led	
IR Led	2 pcs SMD Array IR Leds
IR Distance	30 M
Lens	
Focal length	2.8-8 mm AF Motorized lens
Zoom	3x optical zoom
PTZ	
Pan/Tilt Range	Pan: 0° ~ 350°; Tilt: 5° ~ 90°
Manual Control Speed	80°/Sec
Other Function	
POE	Internal POE
Audio	Internal Microphone
Reset	Cable with reset button
Network Services	
Protocol	HTTP/RTSP/FTP/SMTP/DHCP/NTP/NFS/RTMP, etc.
P2P	Yes
Web	IE, Firefox, Chrome, Edge, Safari
Media	CMS, Android, IOS
ONVIF	17.06 compatible
General	
Network Port	1-RJ45, 100Mbps, POE optional
Power Supply	12 VDC ± 10%
Power Consumption	< 5 W
Operating Temp.	-30°C-(+60)°C, 10%-90%RH