APP Download

Please scan the QR code below to download UBox APP for this camera.
Or search **UBox** in App Store or Google Play.

Support

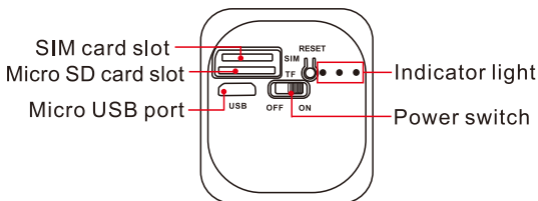

iOS Android Download App(iOS&android)

After APP installed, please register and login into your own UBox account.

Device & Indicator Light

- SIM card slot
- Micro SD card slot
- Micro USB port
- RESET
- SIM
- TF
- USB
- OFF ON
- Indicator light
- Power switch

Blue & red light both on	Booting up
Blue light solid on	Ready for QR code scan, or in live view
Blue light flashing	Data run out, or no signal
Red light flashing	Recording
Green light on	Charging
Green light off	Not charging, or fully charged

Internet connection

1

UNITED STATES

Please enter your email

Register

I read and agree to User Agreement and Privacy Policy

Or login with the following account:

2

There is no device, please click the button below to add device.

+ Add a Device

1. Open the UBox APP. Register for your own account.

2. Click "Add a device".Then select "Set up 4G Device".

2

existing device to a new Wi-Fi network.

Setup WIFI suit

Setup WIFI suit devices

Setup 4G Device

Scan QR code to add 4G devices

3

Insert the SIM card, install the antenna, then power on the device. The blue LED will light up after about 1 minute. Click NEXT.

Blue light is not lit

Next

3. Turn on your camera and wait for 1 minute. Click "Next" if the blue light is solid on.

4. If it can't get into the status above, please reset it by pressing on the reset button for 5 seconds. And go to step 3 again.

WiFi Connection

⑤
Scan the QR code on the camera to connect
to your phone.

[Turn flash light on]

⑥
🔵 Front Door   ⌄
🏠 My home-1   ⌄

[Finish]

5. Use your mobile phone to scan the QR code
   on the back of your camera.

6. The system will handle the connection. Please
   wait for the response in APP. Set a name for
   the camera and it's all done!

Device list interface
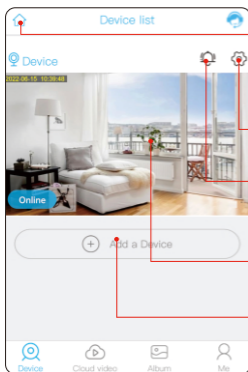
Location setting &
management.

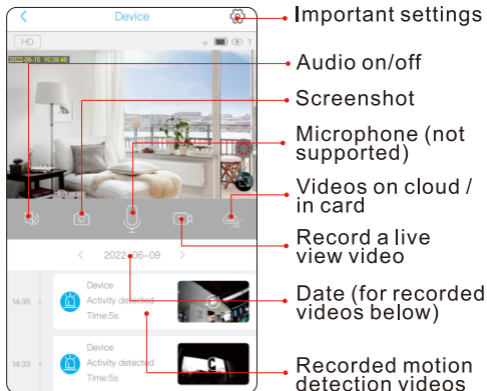Device ID, Share device,
Data service & Cloud
service.

Alarm switch.

Tab the image to enter
the live view interface.

Press to add another
device.

Device interface

- Important settings
- Audio on/off
- Screenshot
- Microphone (not supported)
- Videos on cloud / in card
- Record a live view video
- Date (for recorded videos below)
- Recorded motion detection videos

Some important settings

Motion detection: In Detection sensitivity. If turned on (default is on), camera will record if a motion is detected.

Motion detection schedule: In Arming setting. You can setup a schedule for the motion detection mode.

Video length: In Sleep delay. Add extra video length for every motion detection video. Set to Always for continuous video recording.

Night vision: In Scene mode. Normal mode is for automatic night vision. Night vision mode is for black & white only.