



**Model: SST-4N1-D1-2M**

**2 MP 1080P Turret 4in1 Camera**

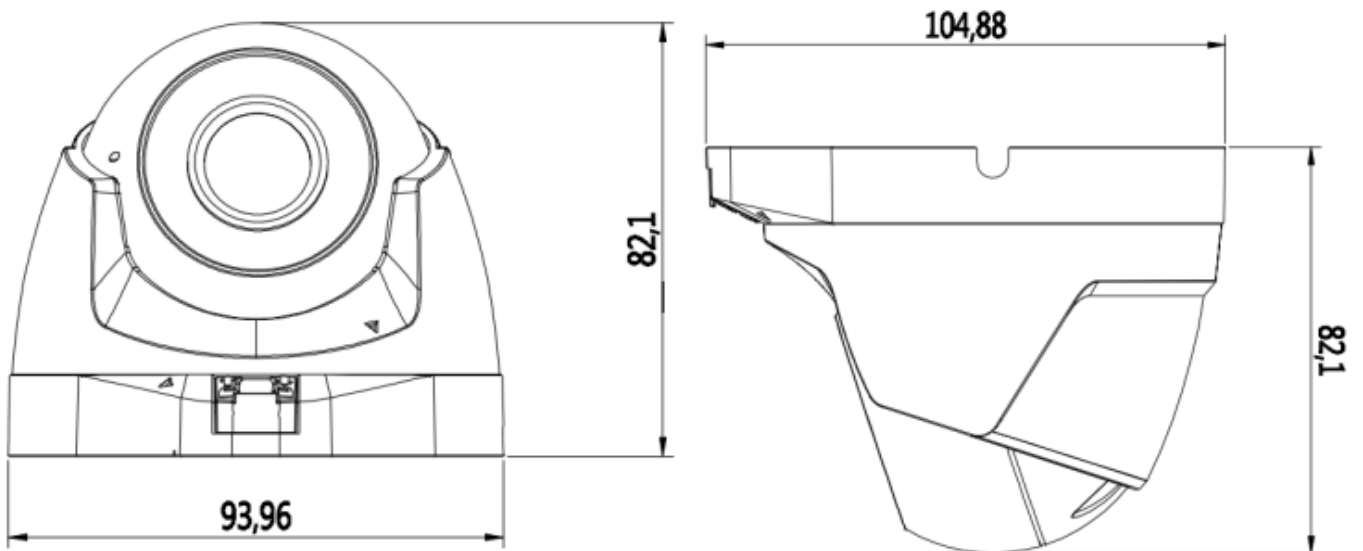

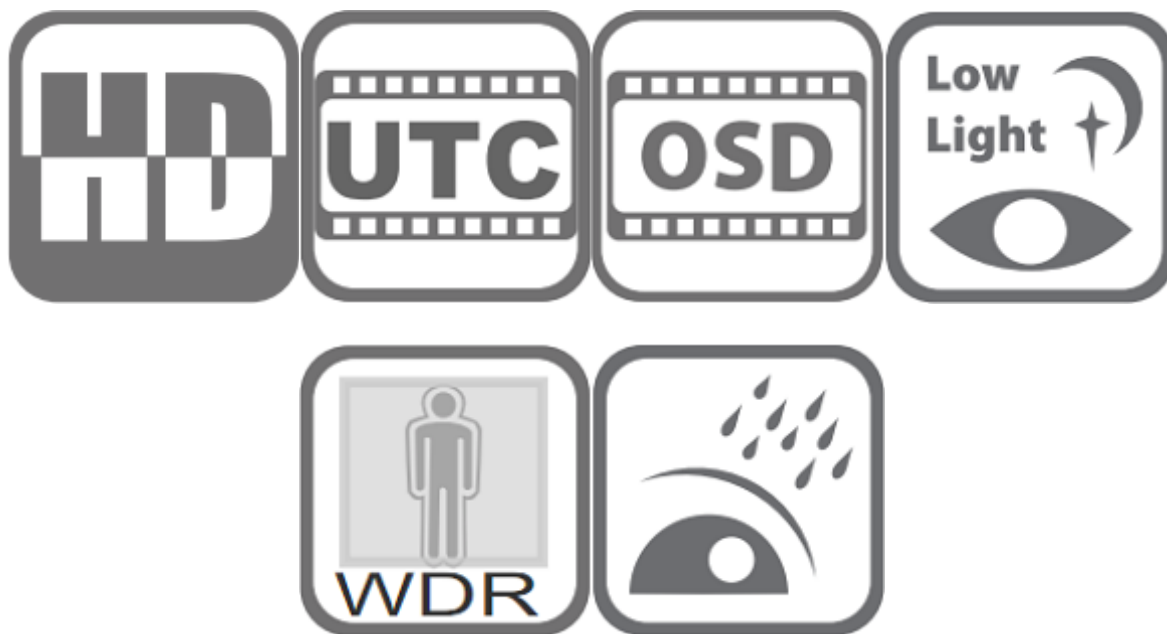

## Features:

- ❖ 4-in-1 HDCVI / HDTV/ AHD / CVBS optional output
- ❖ Full HD resolution 1920 x 1080P
- ❖ Ultra low illumination 0.01Lux
- ❖ Up to 300M long distance and high speed real time monitoring
- ❖ OSD menu control up the coaxial cable (UTC)
- ❖ Day/Night (ICR), AWB, AGC, DNR, D-WDR, Flip
- ❖ Lightning protection
- ❖ Strong water-proof housing, IP66
- ❖ 18 pcs SMD IR Led, distance 20-30 meters
- ❖ 2.8 mm fixed lens

## Technical Specifications:

<b>Model</b>	<b>SST-4N1-D1-2M</b>
<b>Camera</b>	
Image Sensor	1/2.9" 2 Mega pixels CMOS
Chipset	GC2053+TP3822
Effective Pixels	1920(H)×1080 (V)
Video Resolution	1080P@25/30fps
Electronic Shutter	AUTO, 1/25 - 1/10,000s
Min. Illumination	0.01Lux@F1.2(AGC ON), 0Lux IR on
Video System	PAL/NTSC
Video Output	1 channel, HDCVI / HDTVI/AHD/CVBS , adjustable
Video Switch	DIP switch
Mic	Yes (TVI Mode available)
Day/Night	Auto/Color/(B/W)/EXT
WDR	Digital WDR
White Balance	ATW/Manual
AGC/BLC	Support
DNR	2D NR
OSD Menu	Multiple languages OSD menu control up the coaxial cable (UTC)
<b>IR Led</b>	
IR Led	18pcs SMD Leds
IR Distance	20-30 M
<b>Lens</b>	
Focal length	2.8 mm fixed lens
<b>General</b>	
Power Supply	12 VDC ± 10%
Power Consumption	< 5 W
Operating Temp.	-20 °C-(+60) °C, 10%-90%RH